


## CONES TÉRMICO CURVE BT50 cv

## Categorias

- Curve

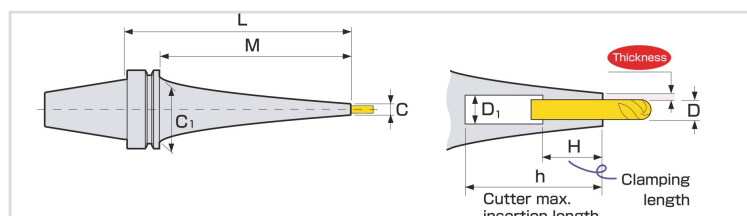

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930108SLSA04165	BT50-SLSA4-165 cv	4	7	1.5	165	127	85	5	12	220
930108SLSA04195	BT50-SLSA4-195 cv	4	7	1.5	195	157	85	5	12	250
930108SLSA04225	BT50-SLSA4-225 cv	4	7	1.5	225	187	85	5	12	280
930108SLSA04255	BT50-SLSA4-255 cv	4	7	1.5	255	217	85	5	12	310
930108SLSA04285	BT50-SLSA4-285 cv	4	7	1.5	285	247	85	5	12	340
930108SLSA04315	BT50-SLSA4-315 cv	4	7	1.5	315	277	85	5	12	370
930108SLSA06165	BT50-SLSA6-165 cv	6	9	1.5	165	127	85	7	18	220
930108SLSA06195	BT50-SLSA6-195 cv	6	9	1.5	195	157	85	7	18	250
930108SLSA06225	BT50-SLSA6-225 cv	6	9	1.5	225	187	85	7	18	280
930108SLSA06255	BT50-SLSA6-255 cv	6	9	1.5	255	217	85	7	18	310
930108SLSA06285	BT50-SLSA6-285 cv	6	9	1.5	285	247	85	7	18	340
930108SLSA06315	BT50-SLSA6-315 cv	6	9	1.5	315	277	85	7	18	370
930108SLSA08165	BT50-SLSA8-165 cv	8	11	1.5	165	127	85	9	24	220
930108SLSA08195	BT50-SLSA8-195 cv	8	11	1.5	195	157	85	9	24	250
930108SLSA08225	BT50-SLSA8-225 cv	8	11	1.5	225	187	85	9	24	280
930108SLSA08255	BT50-SLSA8-255 cv	8	11	1.5	255	217	85	9	24	310
930108SLSA08285	BT50-SLSA8-285 cv	8	11	1.5	285	247	85	9	24	340
930108SLSA08315	BT50-SLSA8-315 cv	8	11	1.5	315	277	85	9	24	370
930108SLRA08195	BT50-SLRA8-195 cv	8	16	4	195	157	85	9	24	250
930108SLRA08225	BT50-SLRA8-225 cv	8	16	4	225	187	85	9	24	280
930108SLRA08255	BT50-SLRA8-255 cv	8	16	4	255	217	85	9	24	310
930108SLRA08285	BT50-SLRA8-285 cv	8	16	4	285	247	85	9	24	340
930108SLFA08195	BT50-SLFA8-195 cv	8	16	4	195	157	85	9	24	250
930108SLFA08225	BT50-SLFA8-225 cv	8	16	4	225	187	85	9	24	280
930108SLFA08255	BT50-SLFA8-255 cv	8	16	4	255	217	85	9	24	310
930108SLFA08285	BT50-SLFA8-285 cv	8	16	4	285	247	85	9	24	340

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930108SLSA10165	BT50-SLSA10-165 cv	10	13	1.5	165	127	85	11	30	220
930108SLSA10195	BT50-SLSA10-195 cv	10	13	1.5	195	157	85	11	30	250
930108SLSA10225	BT50-SLSA10-225 cv	10	13	1.5	225	187	85	11	30	280
930108SLSA10255	BT50-SLSA10-255 cv	10	13	1.5	255	217	85	11	30	310
930108SLSA10285	BT50-SLSA10-285 cv	10	13	1.5	285	247	85	11	30	340
930108SLSA10315	BT50-SLSA10-315 cv	10	13	1.5	315	277	85	11	30	370
930108SLRA10165	BT50-SLRA10-165 cv	10	19	4.5	165	127	85	11	30	220
930108SLRA10195	BT50-SLRA10-195 cv	10	19	4.5	195	157	85	11	30	250
930108SLRA10225	BT50-SLRA10-225 cv	10	19	4.5	225	187	85	11	30	280
930108SLRA10255	BT50-SLRA10-255 cv	10	19	4.5	255	217	85	11	30	310
930108SLRA10285	BT50-SLRA10-285 cv	10	19	4.5	285	247	85	11	30	340
930108SLFA10165	BT50-SLFA10-165 cv	10	19	4.5	165	127	85	11	30	220
930108SLFA10195	BT50-SLFA10-195 cv	10	19	4.5	195	157	85	11	30	250
930108SLFA10225	BT50-SLFA10-225 cv	10	19	4.5	225	187	85	11	30	280
930108SLFA10255	BT50-SLFA10-255 cv	10	19	4.5	255	217	85	11	30	310
930108SLFA10285	BT50-SLFA10-285 cv	10	19	4.5	285	247	85	11	30	340
930108SLSA12165	BT50-SLSA12-165 cv	12	15	1.5	165	127	84	13	30	220
930108SLSA12195	BT50-SLSA12-195 cv	12	15	1.5	195	157	85	13	30	250
930108SLSA12225	BT50-SLSA12-225 cv	12	15	1.5	225	187	85	13	30	280
930108SLSA12255	BT50-SLSA12-255 cv	12	15	1.5	255	217	85	13	30	310
930108SLSA12285	BT50-SLSA12-285 cv	12	15	1.5	285	247	85	13	30	340
930108SLSA12315	BT50-SLSA12-315 cv	12	15	1.5	315	277	85	13	30	370
930108SLRA12165	BT50-SLRA12-165 cv	12	22	5	165	127	85	14	30	220
930108SLRA12195	BT50-SLRA12-195 cv	12	22	5	195	157	85	13	30	250
930108SLRA12225	BT50-SLRA12-225 cv	12	22	5	225	187	85	13	30	280
930108SLRA12255	BT50-SLRA12-255 cv	12	22	5	255	217	85	13	30	310
930108SLRA12285	BT50-SLRA12-285 cv	12	22	5	285	247	85	13	30	340
930108SLFA12165	BT50-SLFA12-165 cv	12	22	5	165	127	85	14	30	220
930108SLFA12195	BT50-SLFA12-195 cv	12	22	5	195	157	85	13	30	250
930108SLFA12225	BT50-SLFA12-225 cv	12	22	5	225	187	85	13	30	280
930108SLFA12255	BT50-SLFA12-255 cv	12	22	5	255	217	85	13	30	310
930108SLFA12285	BT50-SLFA12-285 cv	12	22	5	285	247	85	13	30	340
930108SLSB16165	BT50-SLSB16-165 cv	16	21	2.5	165	127	85	17	32	220
930108SLSB16195	BT50-SLSB16-195 cv	16	21	2.5	195	157	85	17	32	250
930108SLSB16225	BT50-SLSB16-225 cv	16	21	2.5	225	187	85	17	32	280
930108SLSB16255	BT50-SLSB16-255 cv	16	21	2.5	255	217	85	17	32	310
930108SLSB16285	BT50-SLSB16-285 cv	16	21	2.5	285	247	85	17	32	340
930108SLSB16315	BT50-SLSB16-315 cv	16	21	2.5	315	277	85	17	32	370
930108SLSB20165	BT50-SLSB20-165 cv	20	26	3	165	127	85	21	40	220
930108SLSB20195	BT50-SLSB20-195 cv	20	26	3	195	157	85	21	40	250
930108SLSB20225	BT50-SLSB20-225 cv	20	26	3	225	187	85	21	40	280
930108SLSB20255	BT50-SLSB20-255 cv	20	26	3	255	217	85	21	40	310
930108SLSB20285	BT50-SLSB20-285 cv	20	26	3	285	247	85	21	40	340

Ref.	Descrição	ØD	ØC	Thickness	L	M	ØC1	ØD1	H	h
930108SLSB20315	BT50-SLSB20-315 cv	20	26	3	315	277	85	21	40	370

